


RECOMMENDED SAFETY PRECAUTIONS



Protective footwear when lifting panels

Safety glasses when drilling

NOTE:
Isolation valves are provided to allow isolation of the Hydra Classic. 15mm or 22mm pipework should be used as much as possible, reducing to 10mm. If a pump is fitted, check the manufacturers instructions for the preferred location.

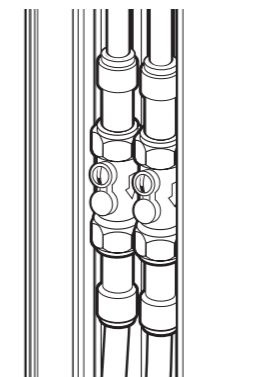

WATER DELIVERY RATES (Flow Control Fully Open)

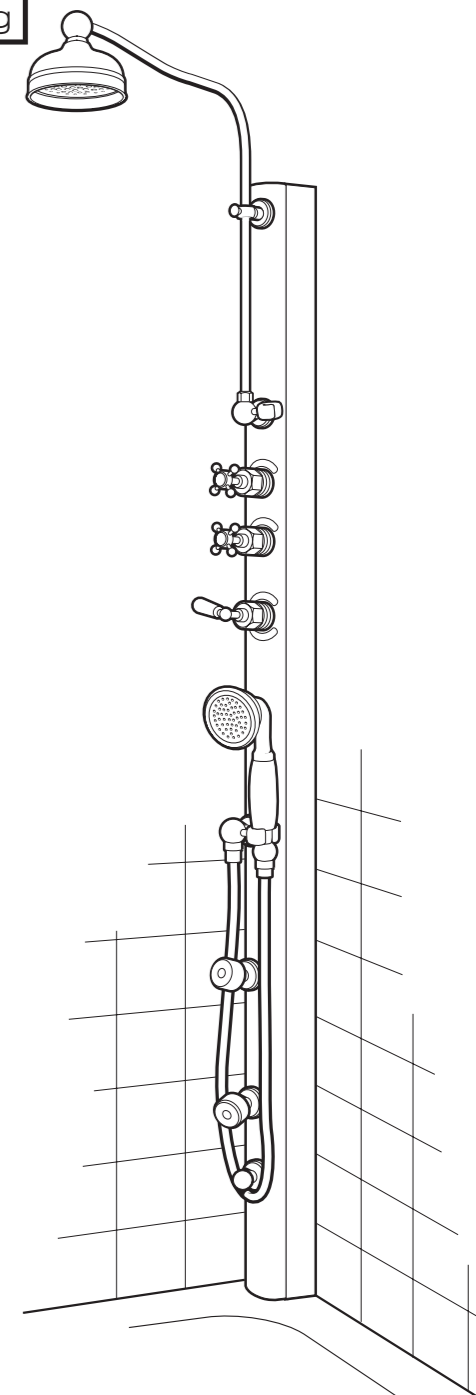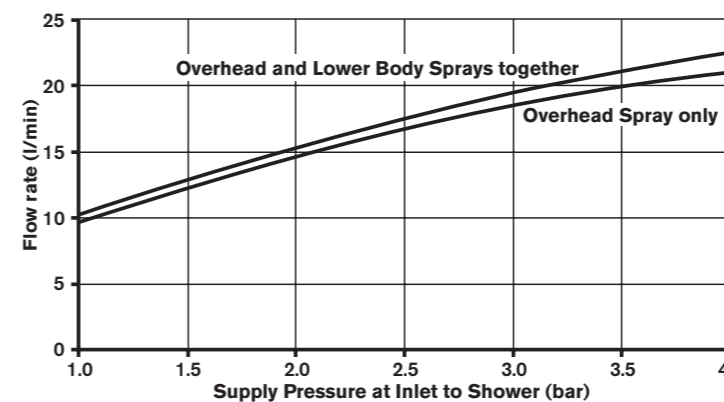

Hydra Classic (414)

Kohler Daryl Limited
 Alfred Road, Wallasey, Wirral, CH44 7HY England
 Tel 44 (0)151 606 5000 Fax 44 (0)151 638 0303
 www.daryl-showers.co.uk
 E-mail Daryl@daryl-showers.co.uk



44 (0)151 606 5000

