




RECOMMENDED SAFETY PRECAUTIONS




Protective footwear when lifting panels

Safety glasses when drilling

NOTE:
Isolation valves are provided to allow isolation of the Hydra Senta. 15mm or 22mm pipework should be used as much as possible, reducing to 10mm. If a pump is fitted, check the manufacturers instructions for the preferred location.

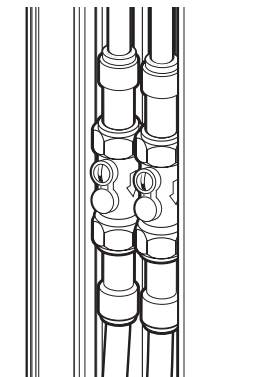

**WATER DELIVERY RATES
(Flow Control Fully Open)**

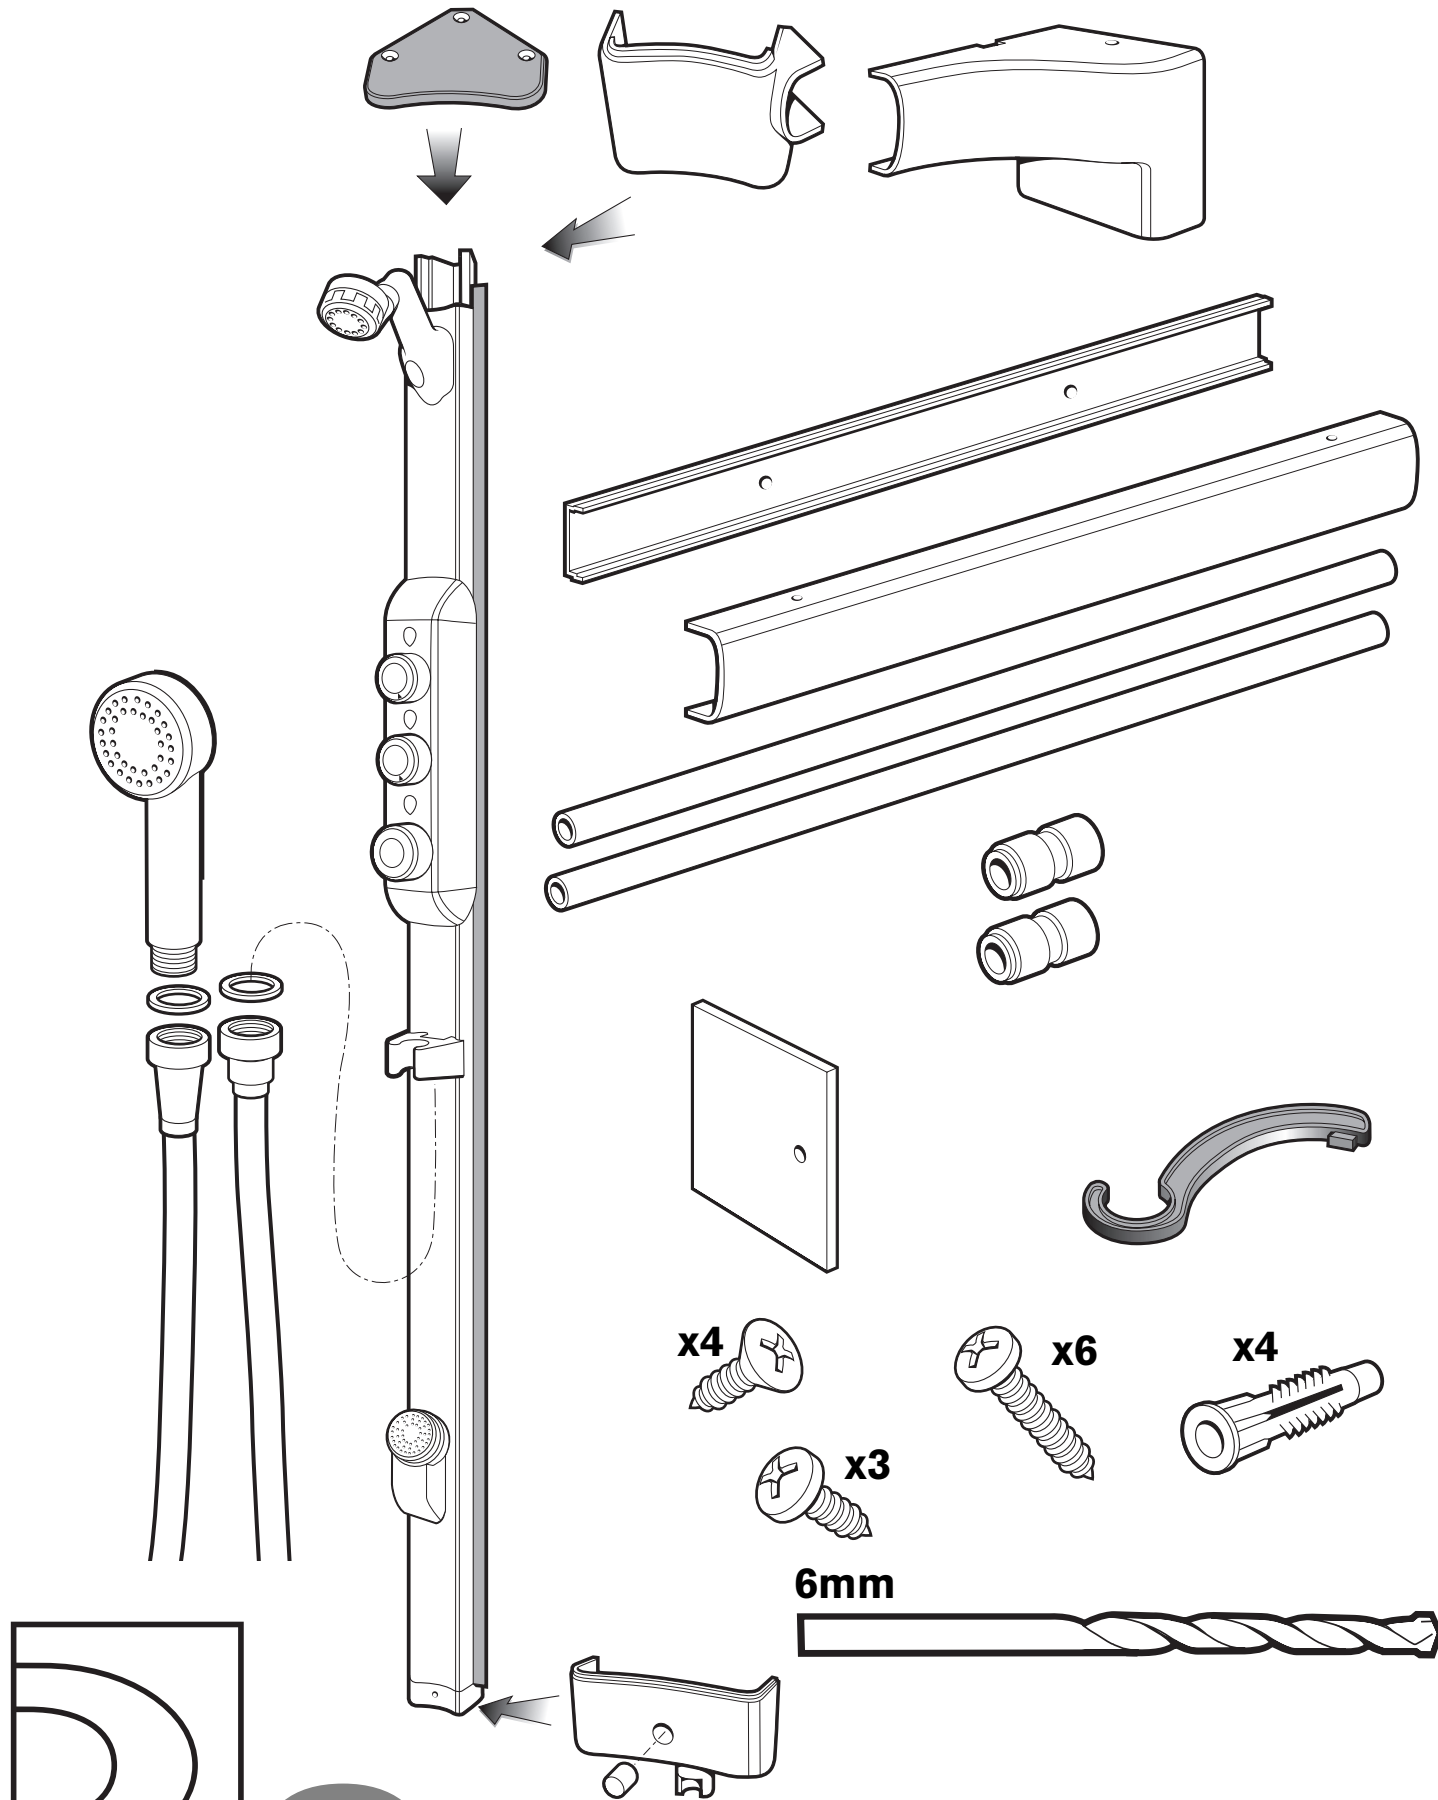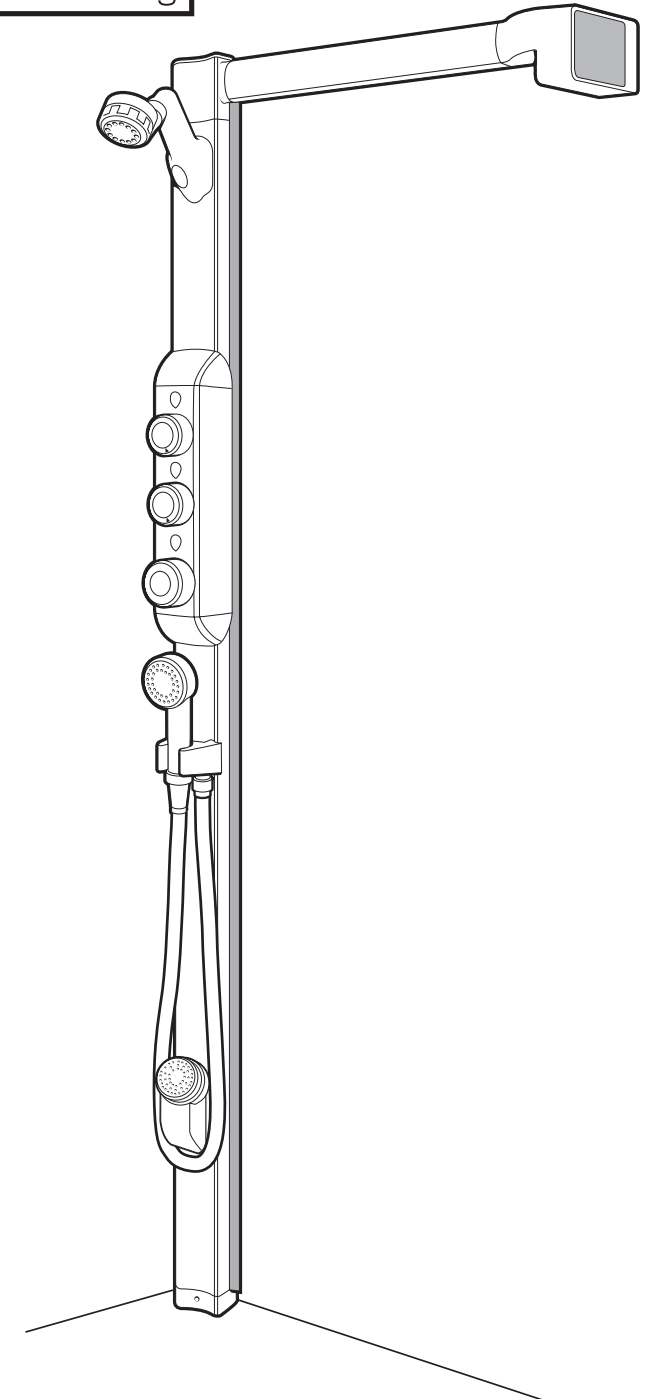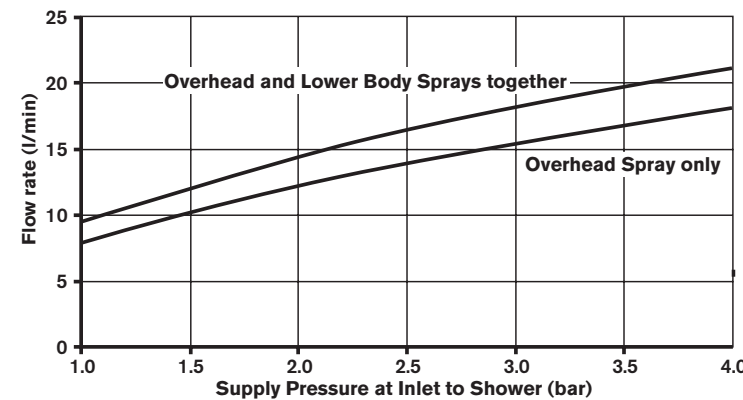

44 (0)151 606 5000

**Hydra Senta
(401 Extended)**

Kohler Daryl Limited
Alfred Road, Wallasey, Wirral, CH44 7HY England
Tel 44 (0)151 606 5000 Fax 44 (0)151 638 0303
www.daryl-showers.co.uk
E-mail Daryl@daryl-showers.co.uk

